



特性 *FEATURES*

- 品質優良-採”聚二氧苯”材質外殼,48小時耐熱度測試,24小時負載測試。
Excellent quality-NORLY case, 48 hours burn-in testing & 24 hours load testing.
- 高精確度,容易操作。 *High accuracy, easy operation.*
- 感溫元件異常,斷線檢知(除TC 910外)。 *With display of sensor break (exclusive model No. TC 910)*
- 可任選On/Off, P, PD 三種控制方式。 *Selection - On / Off, P, PD.*

DIMENSIONS: (Unit: mm) 尺寸圖:

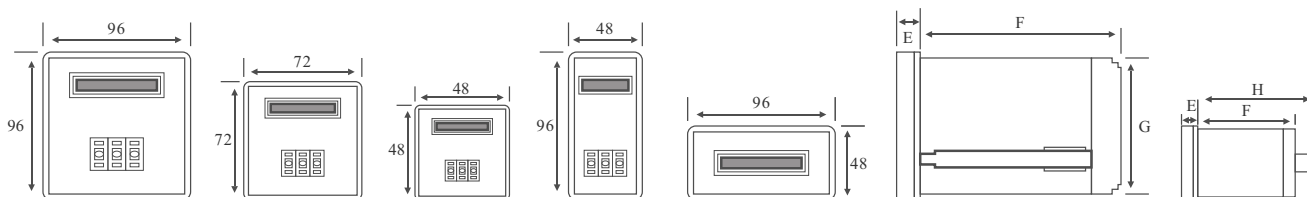

PANEL CUTOOUT 開孔尺寸圖:



SIZE	A	B	C	D	E	F	H	G
96mm x 96mm	92 ^{+0.8} ₋₀	92 ⁺¹ ₋₀	120	120	11	85	92	
72mm x 72mm	68 ^{+0.8} ₋₀	68 ⁺¹ ₋₀	90	90	11	85	68	
48mm x 96mm	92 ^{+0.8} ₋₀	45 ⁺¹ ₋₀	120	60	11	85	92	
96mm x 48mm	45 ⁺¹ ₋₀	92 ^{+0.6} ₋₀	60	120	11	85	45	
48mm x 48mm	45 ^{+0.6} ₋₀	45 ^{+0.6} ₋₀	60	60	8	100	45	
48mm x 48mm Socket mounted type	45 ^{+0.6} ₋₀	45 ^{+0.6} ₋₀	60	60	6.5	74	45	80

TERMINAL CONNECTIONS 接線說明:

