


## 型號索引

### ORDERING CODE


|                        |   |                                                |
|------------------------|---|------------------------------------------------|
| 系列<br>Series           | N | 產品系列區分 Product Series                          |
| 樣式<br>Type             | C | E: 光電類產品 Photoelectric Sensor Products         |
|                        | E | 1: 圓柱光電 2: 圓柱光纖 3: 方型 5: 光幕 7/8: 鏡片            |
|                        | 1 | 9: 其他 A: 直插接 a: 彎插接                            |
| 直徑/寬<br>Diameter/Width | 0 | 1: Round Photo Sensor 2: Round Optical Fiber   |
|                        | 5 | 3: Rectangular 5: Light Curtain 7/8: Mirror    |
| 長度<br>Length           | 3 | 9: Others A: Straight Connector a: Right-Angle |
|                        | 0 | 08: 8mm 12: 12mm 18: 18mm                      |
| 距離<br>Distance         | 1 | 35: 35mm 50: 50mm                              |
|                        | M | 1m: 1mm m1: 10mm 1C: 1cm C1: 10cm              |
| 輸出方式<br>Output         | N | 1M: 1M M1: 10M 01.10: 單位另訂                     |
|                        | A | P: PNP N: NPN R: Relay                         |
|                        | A | A: A接點 (常開) B: B接點 (常閉)                        |
|                        | A | A: Normal Open B: Normal Close                 |
| 線長<br>Cordset length   | 1 | A: AC D: DC                                    |
|                        | 0 | 01: 1M, 10: 10M, A5: 1.5M, C5: 3.5M            |
| 出線<br>Wire             | 3 | 3: 3線式(3 Wires) 4: 4線式(4 Wires)                |
| 工作電壓<br>Voltage        | 1 | 11A: 110V/AC 22A: 220V/AC                      |
|                        | 1 | A12: 12V/AC                                    |
|                        | A | D24: 24V/DC D30: 30V/DC                        |
| 其他<br>Other            |   | 其他特別規格 Other                                   |

### 響應時間 Response time


檢測狀態變化後輸出ON或OFF信號的遲延時間  
That indicates the delayed time of outputting  
ON or OFF signal after the detected state changas

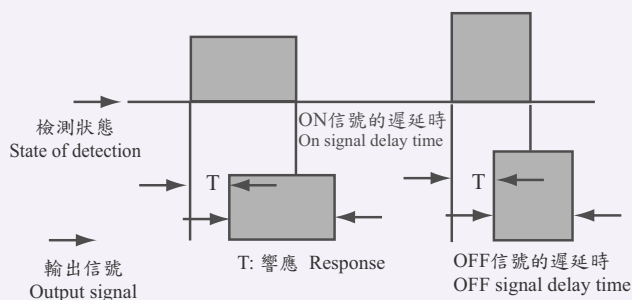

### 光軸光軸 Optic axis of radiance

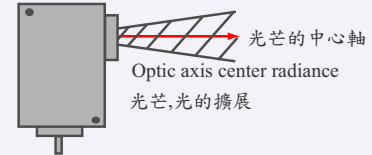


### 檢測軸 Detection axis

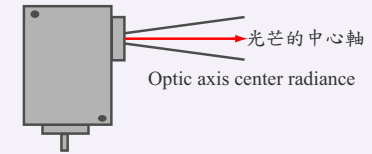


### 檢測距離 Detection distance

對射型 Correlation type  
可穩定設定的投光器和受光器之間的距離  
Stably set distance between light  
projector and photo receptor

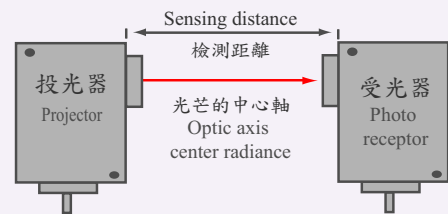

### 檢測距離 Detection distance

反饋反射型 Feedback reflection type  
核准設定的傳感器和反射之間的距離  
(0の場合將0省略)  
Standard setting distance between  
sensor and reflection mirror  
(omit "0" on the occasion with "0")

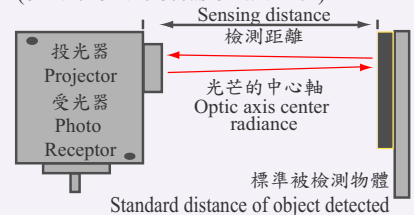

### 檢測距離 Detection distance

漫反射型 Diffused reflection type  
可穩定被檢測物體 (通常是白色無光紙)  
能被穩定檢測的最大距離 (0の場合將0省略)  
The max stable detectable distance of  
detectable object, generally white matt  
paper (omit "0" on the occasion with "0")

