



型號索引 MODEL INTERPRETATION

系列 SERIES	T C	產品類別代號 Model No.
種類 TYPE	K	P (PT) . K (CA) . J . R . W . B . S . E . T
外型 MODEL	1 A	1.3.5: 接地 Grounded; 2.4.6: 非接地 Un-grounded J: 大圓 Big; K: 小圓 Small; L: 大電木 Big Bakelite M: 小電木 Small Bakelite; T: 大T Big T; U: 小T Small T V: 大T電木 Big T Bakelite; W: 小T電木 Small T Bakelite
牙樣 CONNECTON	0 4 F	T: PT管牙, F: PF管牙, M: mm牙, N: 英寸牙(粗牙)
管材 MATERIAL	1 6	16: 不鏽鋼 SUS 316, D: 高銘, KA: Kanthal A-1. IN: Inconel HB: Hastelloy B, HC: Hastelloy C, U5: UMCO 50 AO: 三氧化二鋁 Aluminum oxide, SD: 石英 Silicon Dioxide SN: 氮化矽 Silicon Nitride. CH: Chamotte
管徑 TUBE DIAMETER	0 5	05: 5mm, 06: 6.3mm, 12: 12.7mm
要求 REQUEST	1	0: 沒有規格外要求, 1: 其他要求項目 0: No Request, 1: Other request
管長 LENGTH	2 5 0	025/250: 沒有小數點為mm 2.5: 有小數點單位為M 025/250: No decimal point means mm 2.5: With decimal point means Meter
線材.附圖 WIRE ATTACHED DRAWING	P	P: PVC, T: 鐵弗龍(Teflon), S: 白鐵網(SS Braided) B: 銅網(Copper), F: 玻纖(Fiber Glass) 1: 附圖1張, 2: 附圖2張
管長2.線長 TUBE LENGTH 2 WIRE LENGTH	0 2 M	m: mm . C: 10 mm . M: 1000 mm

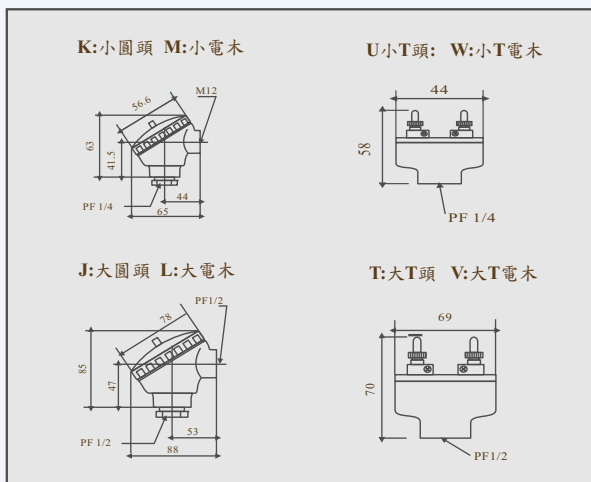

熱電偶結構圖 STRUCTURE OF THERMOCOUPLE ASSEMBLY

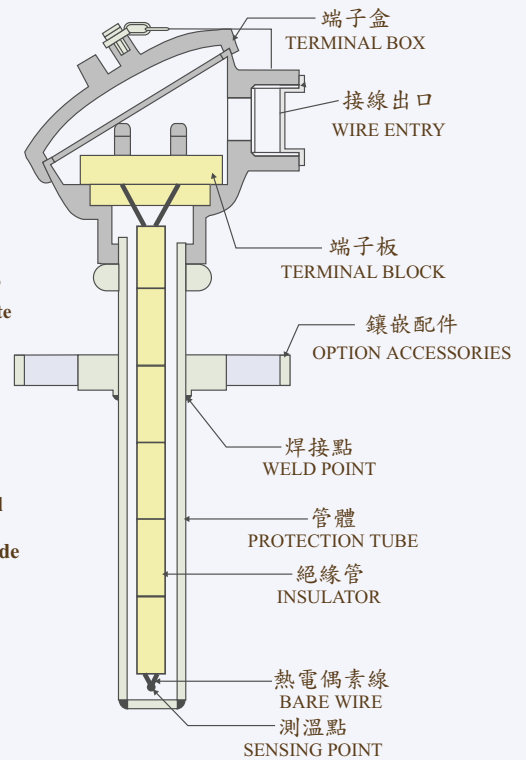

熱電阻結構圖 STRUCTURE OF RTD ASSEMBLY

